




# Catch

Catch is a modern outdoor mat with good dirt-scraping characteristics. The mat is intended for outside use.

Catch prevents spread of dirt in commercial properties, residential environments as well as small and medium-sized offices. It is ideal for use in entrance zones and stairwells. Its scraping function prevents dirt from being brought in.

The mat features a strong bouclé construction that catches and traps dirt well thanks to its coarse yarn structure. Despite its robustness the mat is flexible and remains firmly in place at different temperatures.

With its noticeable coarse structure Catch is both vibrant and practical. Everyone receives a warm welcome with the exclusive appeal of the Catch scraping outdoor mat.

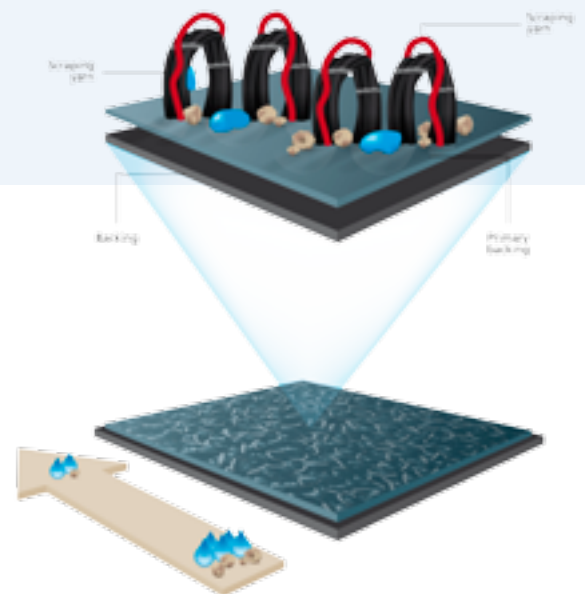



## Specifications

Pile material	Polypropyleen & PVC
Backing	Outdoor PVC
Primary backing	Woven PP
Yarn construction	Bouclé
Pattern	Blended
Colours	3
Pile weight ISO 8543	950 g/m <sup>2</sup>
Total weight ISO 8543	4.000 g/m <sup>2</sup>
Pile height ISO 1766	± 7,0 mm
Total height ISO 1765	± 11,0 mm
Pile density ISO 8543	0.124 g/cm <sup>3</sup>
Number of stitches ISO 1763	± 53.100 /m <sup>2</sup>
Use classification EN 1307	31
Wearing class EN 1963	32
Comfort EN 1307	LC3
Suitability for stairs EN 1963	Occasional use
Suitability for castor chairs EN 985	Occasional use
Dimensional stability ISO 2551	NPD
Light fastness ISO 105 B02	> 7
Water fastness ISO 105 B01	4 - 5
Rubbing fastness ISO 105 X12	4 - 5
Salt water ISO 105 E02	4 - 5
Shampoo BS 1006	4 - 5
Organic solvents ISO 105 X05	4 - 5
Absorption capacity TNO W6034	NPD
Flammability Euroclass EN 13501	Ffl
Slip Resistance EN 13893	DS
Static charge ISO 6356	< 2,0 kV
Sand absorption class*	NPD
Optical class**	NPD
Declaration of Performance	-
Sizes rolls***	100 cm & 200 cm
Roll length	± 10 m
Sizes mats***	-

\* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%. Sand absorption class 3: >=90% \*\* Optical class 5 is best, 1 is lowest. \*\*\* The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.


## Where to use?

	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

## Colours



Brown 052



Anthracite 055



Red 059



EN 14041:2004

## Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.



# RINOS