




Promotap

The Promotap is a coconut fibre mat that absorbs moisture and scrapes dirt. The entrance mat is suitable for situations with low traffic, such as residential environments.

The Promotap is suitable for small entrance zones. The mat is hard-wearing in low traffic areas. It works best in light commercial areas and residential environments.

The mat is made of natural coconut fibre. We have spun this material mechanically. This gives the mat a uniform and regular pattern with little fibre loss. Contrary to what you might expect, the coconut fibre absorbs a vast amount of moisture. The special surface texture of the material contributes to this effect. The mat can be supplied in different pile heights. By adding a unique glass scrim the Promotap is very stable and is not adversely affected by stretching.

The Promotap prevents spread of moisture and dirt, resulting in lower maintenance and cleaning costs for all floors. The phthalate free PVC backing also protects the surface beneath against tracked-in moisture. We supply it in a classical dark coconut colour. Reliable, simple and robust. The timeless Promotap is the result of decades of experience and craftsmanship.

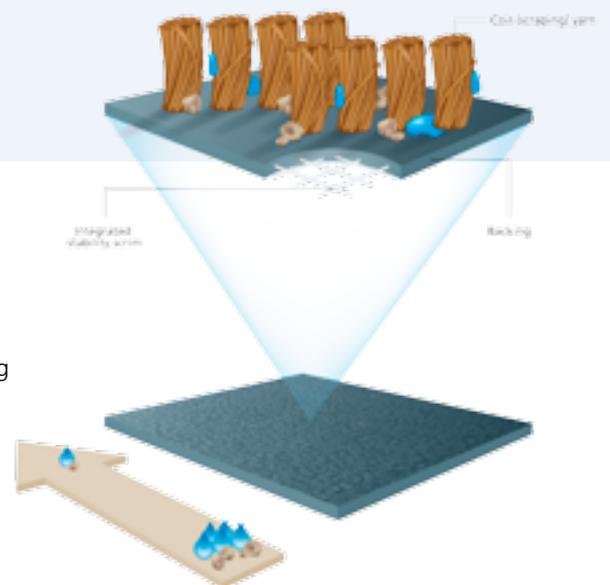



Promotap



Specifications

Pile material	100% machine-spun coconut fibre yarns
Backing	PVC with integrated stability scrim
Primary backing	-
Yarn construction	Velour
Pattern	Uni
Colours	1
Pile weight ISO 8543	13 mm: ± 1.85 kg m ² 17 mm: ± 2.35 kg m ² 20 mm: ± 2.70 kg m ² 23 mm: ± 3.10 kg m ²
Total weight ISO 8543	13 mm: ± 4.75 kg m ² 17 mm: ± 5.25 kg m ² 20 mm: ± 5.60 kg m ² 23 mm: ± 6.00 kg m ²
Pile height ISO 1766	10, 14, 17 & 20 mm
Total height ISO 1765	13, 17, 20 & 23 mm
Pile density ISO 8543	NPD
Number of stitches ISO 1763	± 27.000 /m ²
Use classification EN 1307	NPD
Wearing class EN 1963	NPD
Comfort EN 1307	LC5
Suitability for stairs EN 1963	NPD
Suitability for castor chairs EN 985	NPD
Dimensional stability ISO 2551	NPD
Light fastness ISO 105 B02	NPD
Water fastness ISO 105 B01	NPD
Rubbing fastness ISO 105 X12	NPD
Salt water ISO 105 E02	NPD
Shampoo BS 1006	NPD
Organic solvents ISO 105 X05	NPD
Absorption capacity TNO W6034	NPD
Flammability Euroclass EN 13501	Efl
Slip Resistance EN 13893	DS
Static charge ISO 6356	NPD
Sand absorption class*	NPD
Optical class**	NPD
Declaration of Performance	Available
Sizes rolls***	100 cm & 200 cm
Roll length	± 12,5 m
Sizes mats***	-



* Sand absorption class 1: ≤ 80%, Sand absorption class 2: 80% ≤ class 2 < 90%. Sand absorption class 3: ≥ 90% ** Optical class 5 is best, 1 is lowest. *** The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

Colours



Natural K19

Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.



RINOS